


KS0196 keystudio PM2.5 Shield

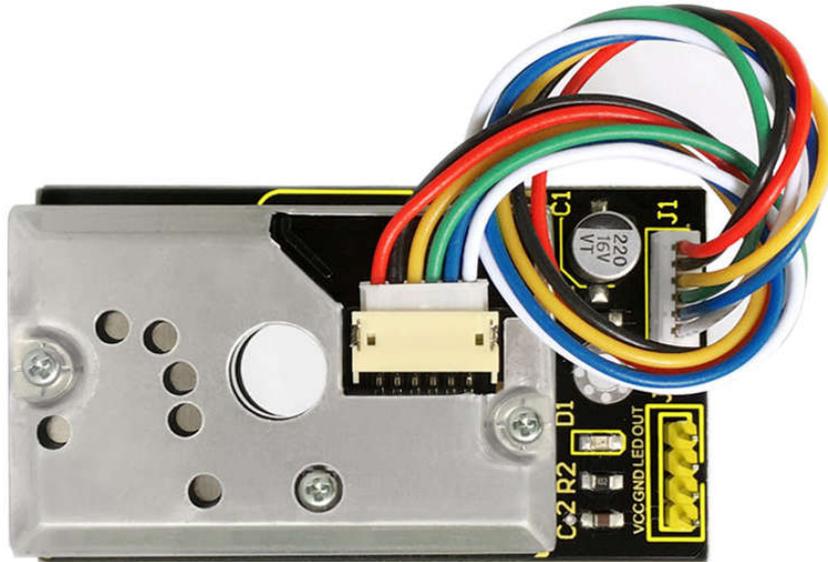

1. Introduction

Dust Sensor based on Sharp optics works well in detecting very delicate particle, like cigarette smoke, is a commonly used system of air purifier.

This device contains IR LED and photoelectric transistor. Arranging them with across corners can detect the reflected light of dust in the air. It has a ultra-low power consumption(Max at 20mA, Typical at 11mA), and can be equipped with sensors up to 7VDC. Analog voltage is proportional to measured concentration of dust , and sensitivity is 0.5V/0.1mg/m3.

2. Technological Parameters

Power Voltage: 5-7V

Working Temperature: -10-65 °C

Current Consumption:Max 20mA

Detecting Value of Minimum Particle: 0.8μ

Sensitivity:0.5V/(0.1mg/m3)

Voltage of Cleaning Air: 0.9V(Typical)

Storage Temperature:-20~80°C

Service Life:5 Years

Size:62mm×32mm×20mm


```

int samplingTime = 280;
int deltaTime = 40;
int sleepTime = 9680;
float voMeasured = 0;
float calcVoltage = 0;
float dustDensity = 0;
void setup() {
    lcd.init(); // initialize the lcd
    lcd.init();
    // Print a message to the LCD.
    lcd.backlight();
    lcd.setCursor(0,0);
    lcd.print("Raw Signal Value: ");
    lcd.setCursor(0,2);
    lcd.print("Voltage:");
    lcd.setCursor(0,3);
    lcd.print("Dust Density:");
    pinMode(ledPower, OUTPUT);
}
void loop() {
    digitalWrite(ledPower,LOW); // power on the LED
    delayMicroseconds(samplingTime);
    voMeasured = analogRead(measurePin); // read the dust value
    delayMicroseconds(deltaTime);
    digitalWrite(ledPower,HIGH); // turn the LED off
    delayMicroseconds(sleepTime);
    // 0 - 5V mapped to 0 - 1023 integer values
    // recover voltage
    calcVoltage = voMeasured * (5.0 / 1024.0);
    // linear equation taken from http://www.howmuchsnow.com/arduino/airquality/
    // Chris Nafis (c) 2012
    dustDensity = 0.17 * calcVoltage - 0.1;
    lcd.setCursor(1,1);
    lcd.print(voMeasured);
    lcd.setCursor(9,2);
    lcd.print(calcVoltage);
    lcd.setCursor(14,3);
    lcd.print(dustDensity);
    delay(1000);
}

```

Project 2: Now, use testing codes.

```

int dustPin=0;
float dustVal=0;
int ledPower=2;

```

```

int delayTime=280;
int delayTime2=40;
float offTime=9680;

void setup() {
Serial.begin(9600);
pinMode(ledPower, OUTPUT);
pinMode(dustPin, INPUT);
}


void loop() {
// ledPower is any digital pin on the arduino connected to Pin 2 on the sensor
digitalWrite(ledPower, LOW);
delayMicroseconds(delayTime);
dustVal=analogRead(dustPin);
delayMicroseconds(delayTime2);
digitalWrite(ledPower, HIGH);
delayMicroseconds(offTime);

delay(1000);
if (dustVal>36.455)
Serial.println((float(dustVal/1024)-0.0356)*120000*0.035);
}


```

5. Result

Result of Project 1 showed as following.

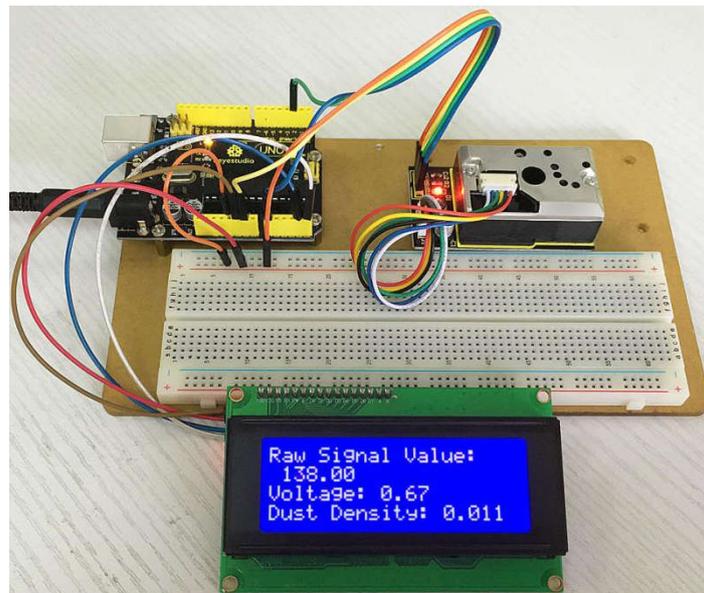

Result of Project 2: Open serial monitor, displaying as following.

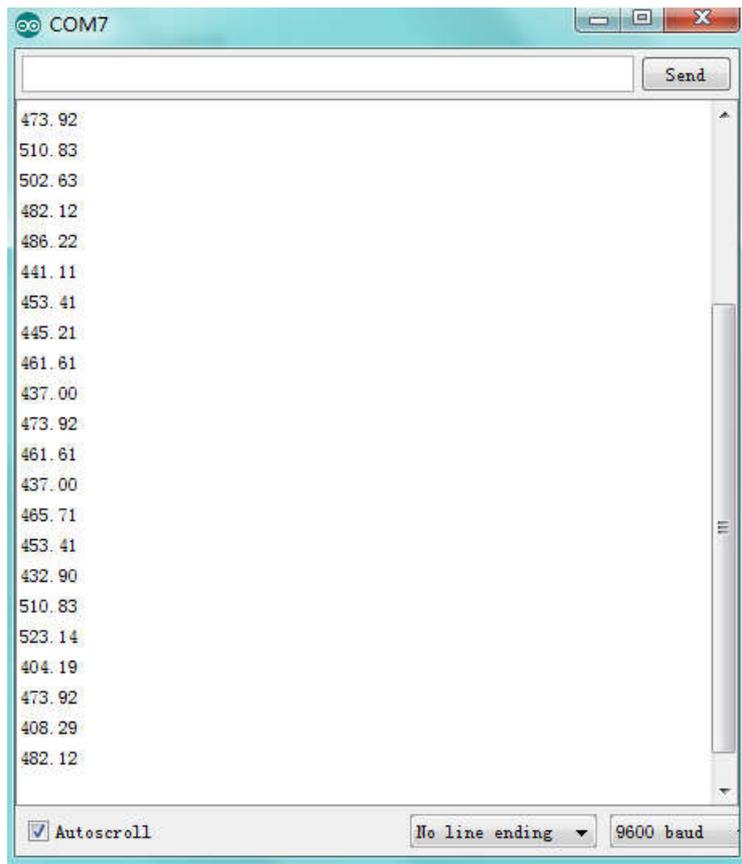

Data compared to air quality:

3000 + = Very Bad

1050-3000 = Bad

300-1050 = Ordinary

150-300 = Good

75-150 = Very Good

0-75 = Tiptop